

Long live analog

Analog tape offers the best chance to create great sounding high-definition masters for digital and vinyl music listening.

When it comes to audio, some aspects of analog technology introduce artifacts and distortions that are perceived as pleasant, and are often musically enhancing and this is something that lies at the heart of the idea of "analog warmth".

Analog audio tapes and cassettes have been used to record famous albums. The technical limitations and imperfections of analog systems have become an integral part of the quality of the recorded sounds that we all grew up with. Each formulation offers like a painter pallet of different colors, and sound differently.

Musicians, labels, word-class studios still want to be totally engaged by music. They love the sound of analog which adds just the right amount of punch, warmth, fuzziness, rounding off or just plain magic to our drums, vocals, guitar, bass with +9, +6, +3 tapes.

RecordingTheMasters is proud to carry the torch of audio analog recording, and will continue to produce and distribute the tapes for audio engineers who like them for their audio technical and emotional properties, mixing the best albums forever.



Product code	Tape Width		Tape Length		Reel Diameter		Reel Type or Pancake	Hub Type
	inch	mm	ft	m	Inch	mm		
sm 900 RECORDING THE MASTERS	0,25	6,3	600	183	5	130	Plastic Reel	Trident
	0,25	6,3	1 200	366	7	180	Plastic Reel	Trident
	0,25	6,3	2 500	762	10,5	265	Plastic Reel	Trident
	0,25	6,3	2 500	762	10,3	250	Pancake	NAB
	0,25	6,3	2 500	762	10,5	265	Metal Reel	NAB
	0,5	12,7	2 500	762	10,5	265	Metal Reel	NAB
	0,5	12,7	2 500	762	10,3	265	Pancake	NAB
	0,5	12,7	3 750	1 143	12	320	Metal Reel	NAB
	1	25,4	2 500	762	10,5	265	Prec. Reel	NAB
	2	50,8	2 500	762	10,5	265	Prec. Reel	NAB
2	50,8	5 000	1 524	14	360	Prec. Reel	NAB	
sm 911 RECORDING THE MASTERS	0,25	6,3	600	183	5	130	Plastic Reel	Trident
	0,25	6,3	1 200	366	7	180	Plastic Reel	Trident
	0,25	6,3	2 500	762	10,5	265	Plastic Reel	Trident
	0,25	6,3	2 500	762	10	250	Pancake	NAB
	0,25	6,3	2 500	762	10,5	265	Metal Reel	NAB
	0,5	12,7	2 500	762	10,5	265	Metal Reel	NAB
	0,5	12,7	2 500	762	10	265	Pancake	NAB
	0,5	12,7	3 750	1 143	12	320	Metal Reel	NAB
	1	25,4	2 500	762	10,5	265	Prec. Reel	NAB
	2	50,8	2 500	762	10,5	265	Prec. Reel	NAB
2	50,8	5 000	1 524	14	360	Prec. Reel	NAB	
sm 468 RECORDING THE MASTERS	0,25	6,3	600	183	5	130	Plastic Reel	Trident
	0,25	6,3	1 200	366	7	180	Plastic Reel	Trident
	0,25	6,3	2 500	762	10,5	265	Plastic Reel	Trident
	0,25	6,3	2 500	762	10,5	265	Metal Reel	NAB
	0,25	6,3	2 500	762	10	265	Pancake	NAB
	0,25	6,3	3 280	1000	11	265	Pancake	NAB
	0,5	12,7	2 500	762	10,5	265	Metal Reel	NAB
	0,5	12,7	2 500	762	10	265	Pancake	NAB
	1	25,4	2 500	762	10,5	265	Prec. Reel	NAB
	2	50,8	2 500	762	10,5	265	Prec. Reel	NAB
2	50,8	5 000	1 524	14	360	Prec. Reel	NAB	
lpr 90 RECORDING THE MASTERS	0,25	6,3	885	270	5	130	Plastic Reel	Trident
	0,25	6,3	1 800	549	7	180	Plastic Reel	Trident
	0,25	6,3	3 608	1100	10,5	250	Plastic Reel	Trident
	0,25	6,3	3 608	1100	10,5	250	Metal Reel	NAB
	0,25	6,3	3 608	1100	10	250	Pancake	NAB
lpr 35 RECORDING THE MASTERS	0,25	6,3	885	270	5	130	Plastic Reel	Trident
	0,25	6,3	1 800	549	7	180	Plastic Reel	Trident
	0,25	6,3	3 608	1100	10,5	250	Plastic Reel	Trident
	0,25	6,3	3 608	1100	10,5	250	Metal Reel	NAB
	0,25	6,3	3 608	1100	10	250	Pancake	NAB


Dealer stamp


facebook.com/RecordingTheMasters/ @recordingthemasters_tapes @RTM_Mag

RECORDING THE MASTERS.COM

MULANN Industries - 53 rue Division Leclerc - 50300 Avranches - France

World Class Professional Audio Tapes and Cassettes

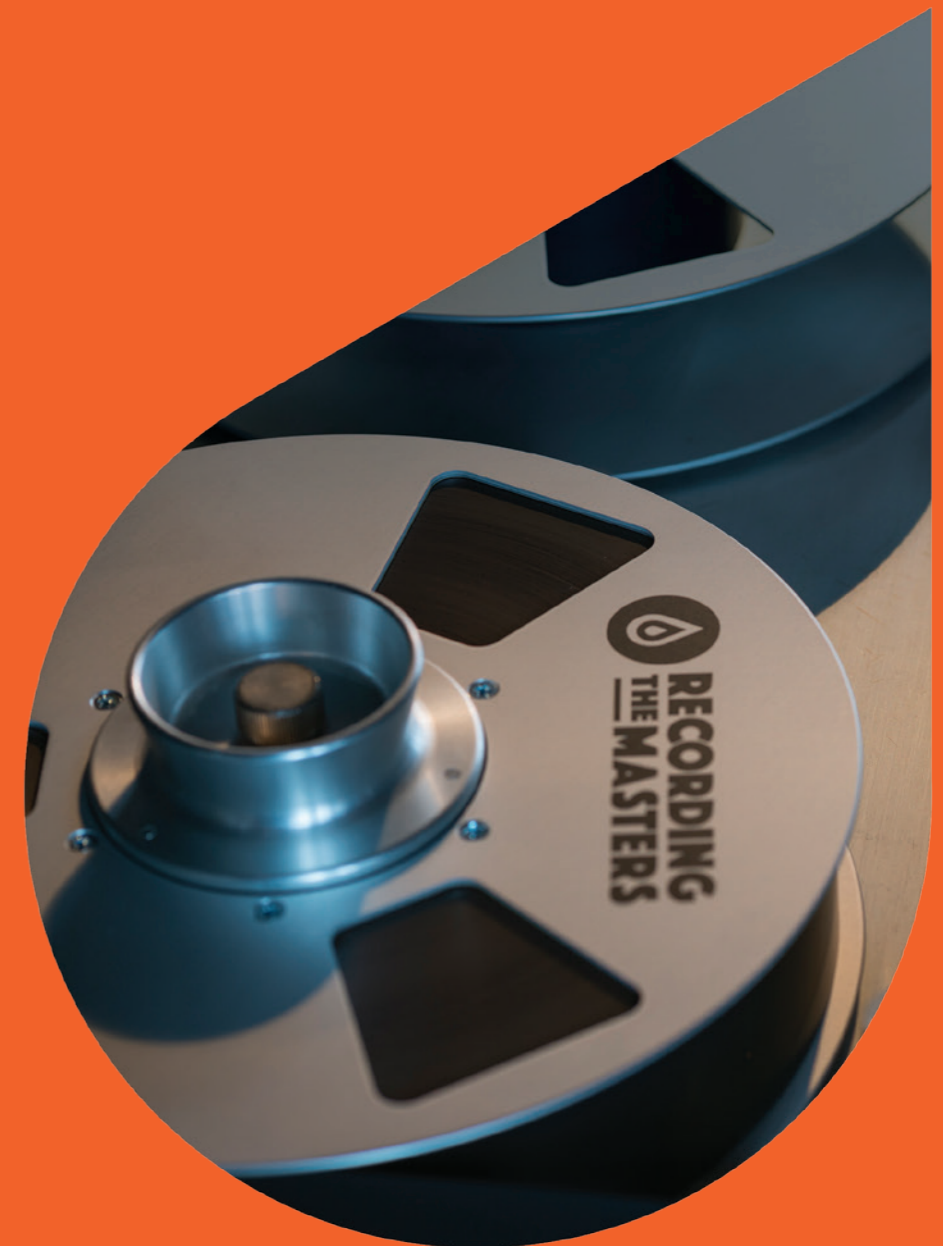

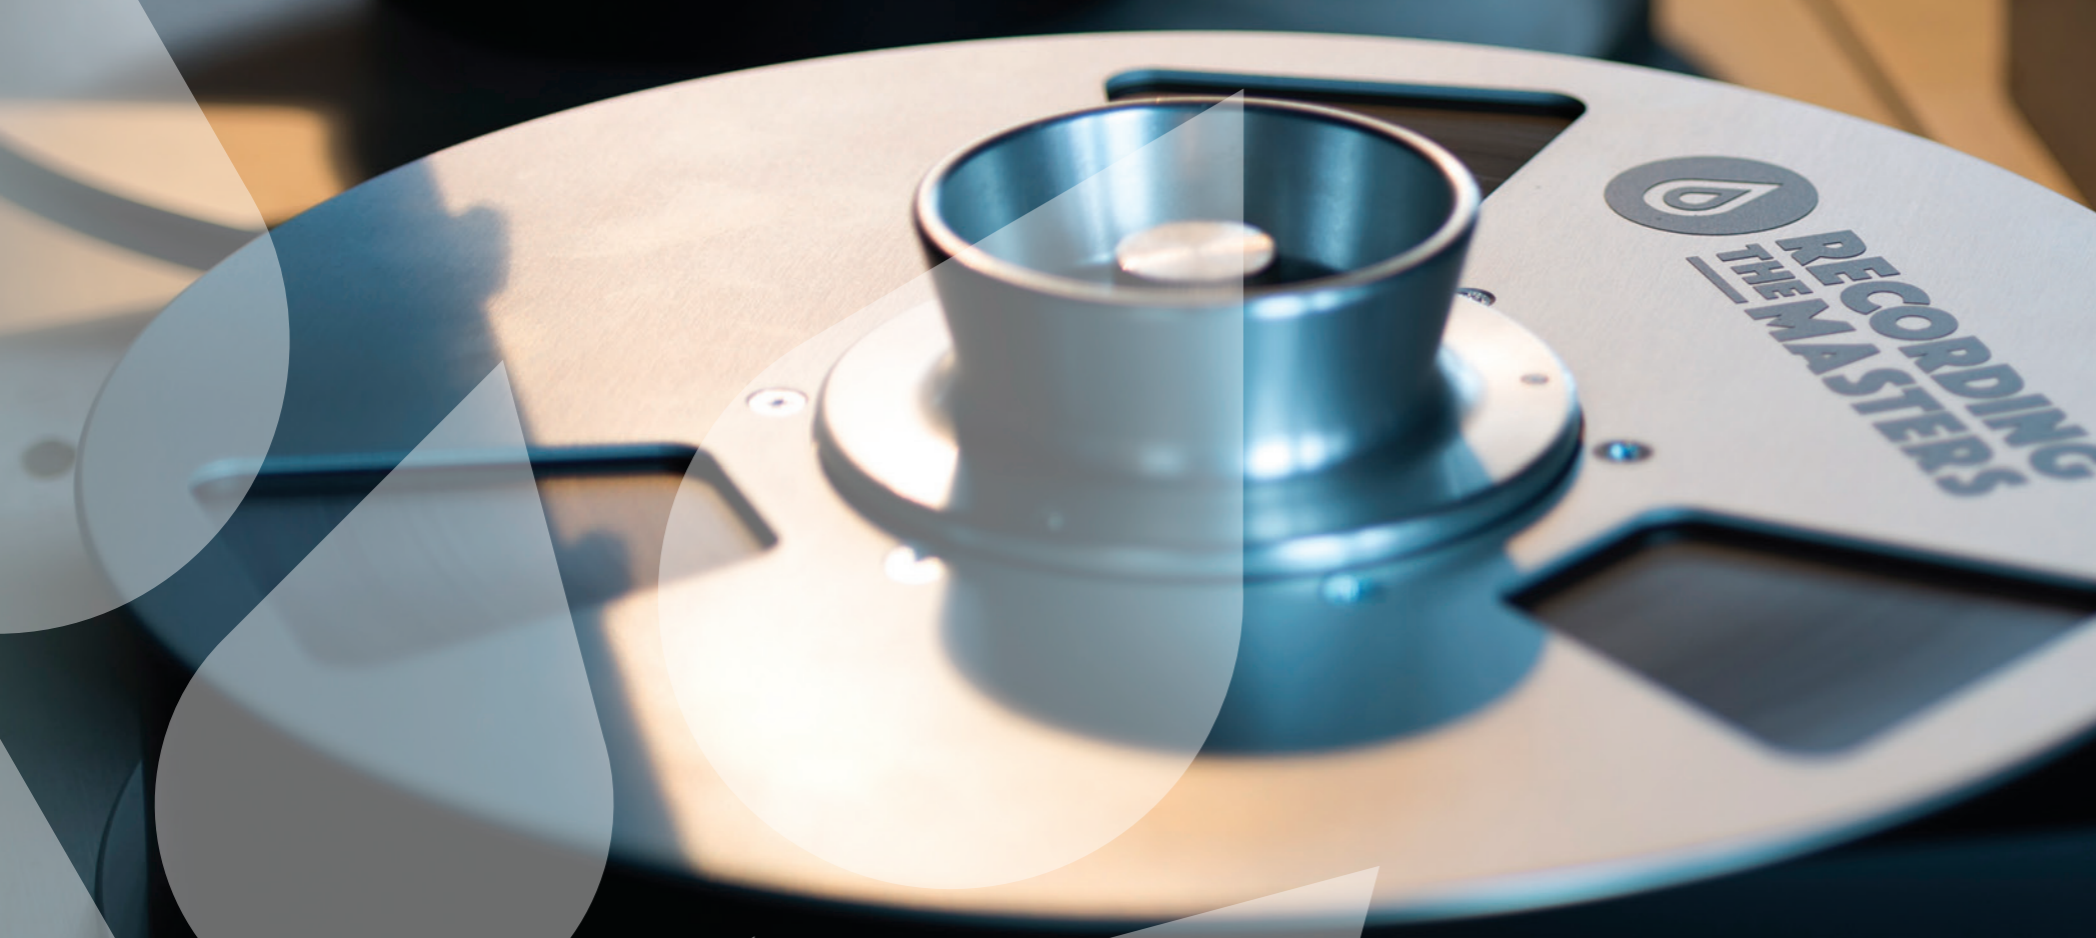

Perforated tapes



Perforated audio tapes are designed for sound recording in the film industry. RecordingTheMasters manufactures perforated audio tapes that are all recognized worldwide and used in the film industry to archive and duplicate deteriorating masters to new, with high-reliability base film that can handle 1 to 4 or 6 audio tracks. We offer classic 16 mm, 17.5 mm and 35 mm perforated and leader tapes.

Instrumentation tapes



There is still a market, invisible to the public: instrumentation tapes. Those tapes, compliant with the IRIG specification, are dedicated to recording high precision signals for scientific, aerospace and military uses. Chosen for its capacity to record high-frequency signals up to 2 MHz, this product requires a very thin and stable coating thickness, as well as a homogeneous deposit and a perfect surface quality to avoid any loss of data. This media is built to preserve sensitive information for long-term archiving. Each tape is tested on its whole length on a dedicated bench test equipment, beyond the standards of music industry.

Pro tapes

**sm⁺⁹
900.**

PREMIUM HIGH OUTPUT STUDIO TAPES

- Backcoated
- Formats: 1/4", 1/2", 1", 2"
- Multitrack
- Mastering recording
- High output
- Wide dynamic range
- High level uniformity up to the highest frequencies
- Low print-through
- Excellent DC noise

**sm⁺⁶
911.**

STANDARD BIAS COMPATIBLE, STUDIO AND ARCHIVE TAPE

- Backcoated
- Formats: 1/4", 1/2", 1", 2"
- Multitrack
- Mastering recording
- High level uniformity up to the highest frequencies
- Excellent DC noise
- Excellent winding even at high speeds
- Low print-through

**sm⁺³
468.**

HIGH BIAS STUDIO AND ARCHIVE TAPE

- Backcoated
- Formats: 1/4", 1/2", 1", 2"
- Multitrack
- Mastering recording
- Excellent dynamic range over the entire frequency spectrum
- Minimal print-through
- High level uniformity up to the highest frequencies
- Excellent winding even at high speeds, allows flangeless operation
- Archive ability, long term stability, worldwide proven

**lpr
35.**

LONG PLAY STANDARD BIAS STUDIO TAPE

- Same formula as the high bias studio tape SM911
- Backcoated
- Formats: 1/4"
- Wide dynamic range
- High level uniformity up to the highest frequencies
- Excellent winding properties
- Can be used for low speed recording

Our audio tapes are available on Pancake, Plastic reel or Metal reel, with different hubs : NAB or Trident. Exist in 1/4", 1/2", 1", 2" (according to the formulation)"

Semi-pro tapes

**lpr
90.**


LONG PLAY HIGH OUTPUT STUDIO TAPE

- Same formula as the high bias studio tape SM900
- Backcoated
- Formats: 1/4"
- Higher Dynamic Range
- Higher Output
- Excellent winding properties
- Low noise, low distortion
- Sounds open and transparent with a solid bottom end

**fox
C60.**

BASED ON LEGENDARY SM900 FORMULA

- Width: 3.81mm
- Minimal print-through
- Type I, normal bias
- Produced from 2018 onwards
- Made in France

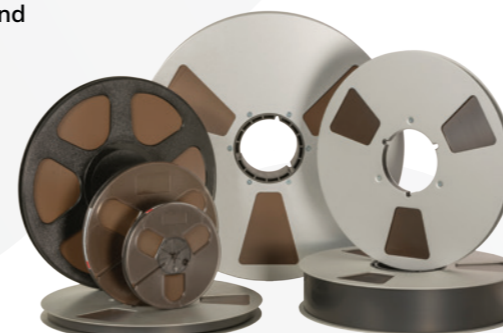

Cassettes

Archiving and Handling Recommendations

For more than 50 years, magnetic tapes have proven themselves to be outstanding as robust, stable carriers of all kinds of information. Nevertheless, problems do occasionally occur during playback. The causes for this usually result from careless handling of the tapes. If handled with a

little care, magnetic tape is without doubt a long lived archive material. The most important rules can be assigned to three typical areas of application. The climatic conditions should nevertheless be observed in any case. A good climate for a person is also a good climate for a magnetic tape.

Operating and storage climate, upper and lower limits:

	Temperature	Relative Humidity
Studio:	15°C-26°C or 59°F-78°F	45%-70%
Archive:	15°C-22°C or 59°F-72°F	40%-60%

Magnetic Tape in the Archive

A tape archive should be provided with functioning air conditioning. At the least a thermometer and a hygrometer should be permanently installed in order to have a running check of the climate in the archive. In cleaning the room, no substances should be used that emit acidic components into the air. In regions with heavy industrial air pollution, appropriate air filters must be available. Steel shelves are preferable to wooden ones. Wood shelves store dampness and produces heat energy and harmful gases in the event of a fire.

Tapes that are used for archiving must have even and smooth winding surfaces. Tapes that have been exposed to different operating modes (eg: fast wind then play then fast wind again) exhibit different pressure distribution during winding. To generate equal pressure distribution, it is necessary to rewind the tapes, possibly in "library mode".

In practice the climatic conditions in a studio and in an archive are not the same. To allow it to acclima-

tize itself, the tape to be used for archiving should lie in the archive for several days (protected from dust) before it is packed into a polyethylene bag and placed in an archival holder for final archiving.

• Magnetic tapes should basically be stored vertically. Tapes on a hub must be fixed on the hub support.

• Audio magnetic tapes should be stored "tail out". This forces a rewind procedure before reuse, whereby the magnetic print-through effect is significantly lessened.

• If boxes other than the originals are used, they must be made of acid-free paper, since acids act as catalysts in the decomposition of certain bonding agents.

• Temperature cycles cause expansion and contraction of the tape, and lead to uneven pressure distribution in winding and harmful effects on the magnetic layer and base film. In archives with temperature deviations > 4°C (>7°F), regular rewinding (every two to three years) is necessary.